



Pack Way
SINCE 1979 PACKAGING SYSTEMS®



PW-1521

STRETCH WRAPPING MACHINE

FEATURES:

- Top priority in our design is to offer beautiful profile, reasonable price, practical function and to reduce the malfunction rate.
- Film carriage is designed at the outside of the pillar. It can tightly wrap the film around the products and the pallet. It also can increase the pallet's security during transportation.
- When moving, the pillar can be directly put down. No need to take apart the film carriage. This saves time and prevents negligence when reinstalling.
- The film carriage is equipped with hinged drive, for smooth vertical movement.
- *Speed is adjustable.*
- Turntable is equipped with hinged drive, for stable turning during pallet loading.
- *Speed is adjustable.*




PW-1821

For large-sized pallet




OPTIONS

- Film pre-stretch system (50%, 100%, 150%, 200%)
- Access ramp (see right figures)
- Top press plate

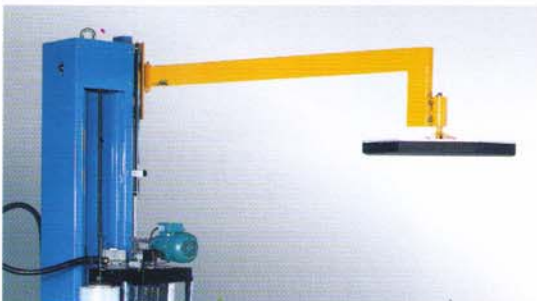

Other spec is on request

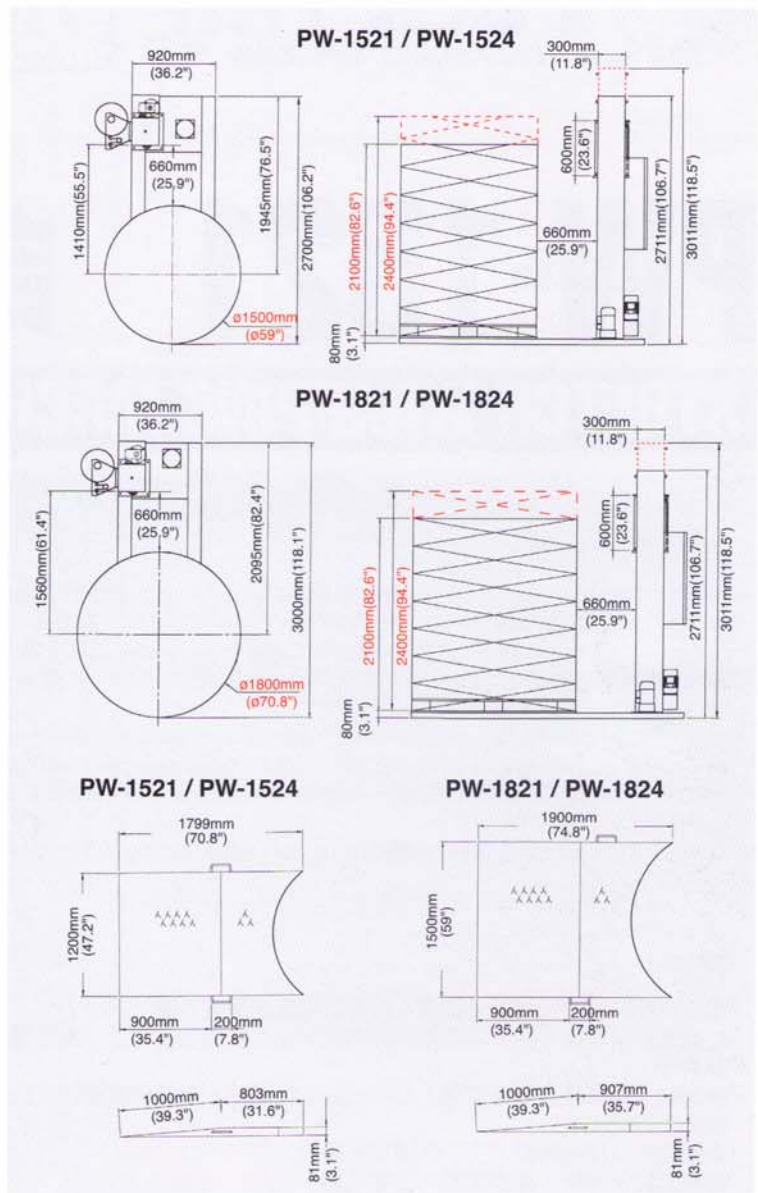

SPECIFICATIONS

Model	PW-1521	PW-1524	PW-1821	PW-1824
Turntable diameter	1500mm	1500mm	1800mm	1800mm
Wrapping height (including pallet)	2100mm	2400mm	2100mm	2400mm
Loading weight	Max. 2000kgs (4400 lbs)			
Power supply	Single phase or 3 phase 220V/380V/415V/440V 50/60Hz			
Power consumption	Electrical magnetic brake 1.3KW Turntable motor 1HP Film carriage motor 1/2HP			
Power consumption	Pre-stretch system 1.7KW Turntable motor 1HP Film carriage motor 1/2HP			
Film carriage system	Electrical magnetic brake (Adjustable) Option: Film pre-stretch system			
Turntable speed	5~15 RPM (Adjustable)			
Film carriage speed	5M/per min. (Adjustable)			
Film spec.	Film reel core dia.: 76mm Film reel outside dia.: Max. 350mm			
PE Film thickness	17~35 microns			

NOTE: Specifications subject to change without notice.

Distributor: