



Collamat® 3600

The multifunctional. With the Collamat® 3600 labelling system you get a perfect solution for any standard application. It is compact, space-saving, easy to operate, and offers a sufficient speed range. The typical Collamat® modularity allows you to configure the system optimal to your production requirements. Designed for semi or fully automated applications the Collamat® 3600 offers a great solution for smaller productions with demands to long lasting functionality and reliability.

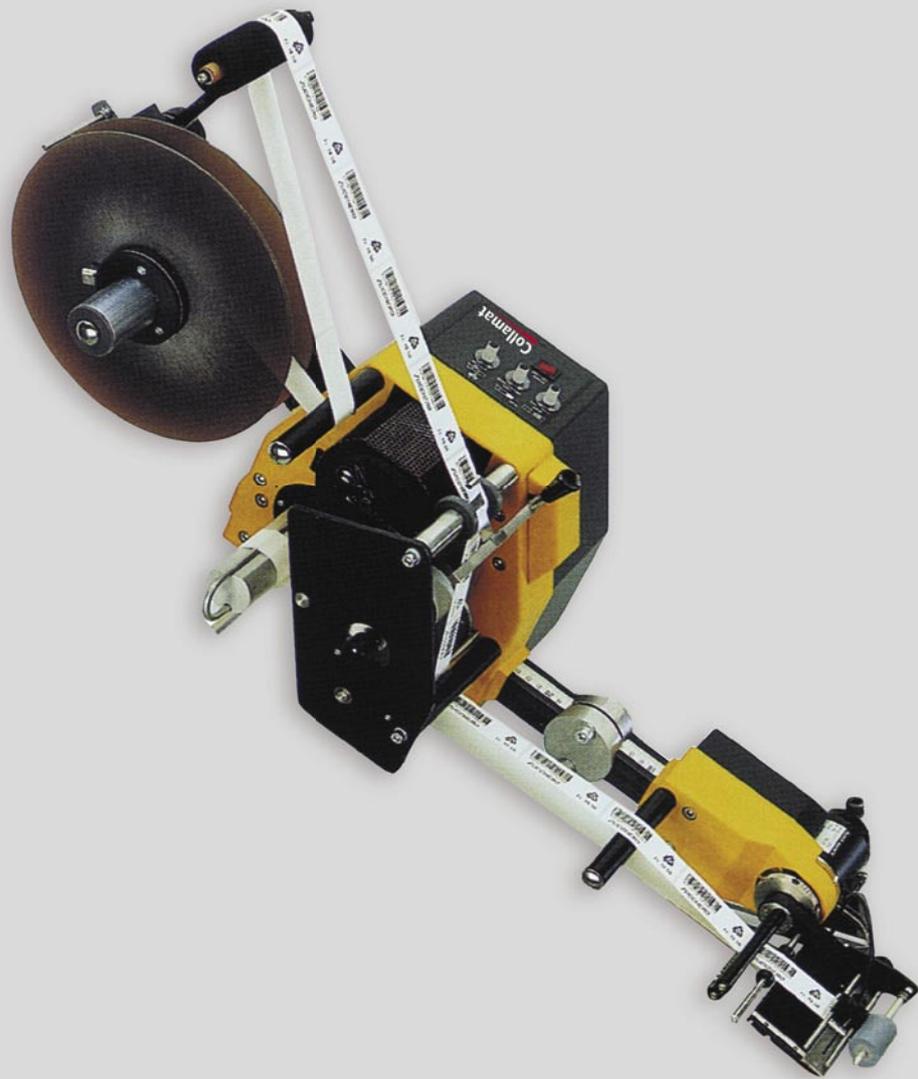

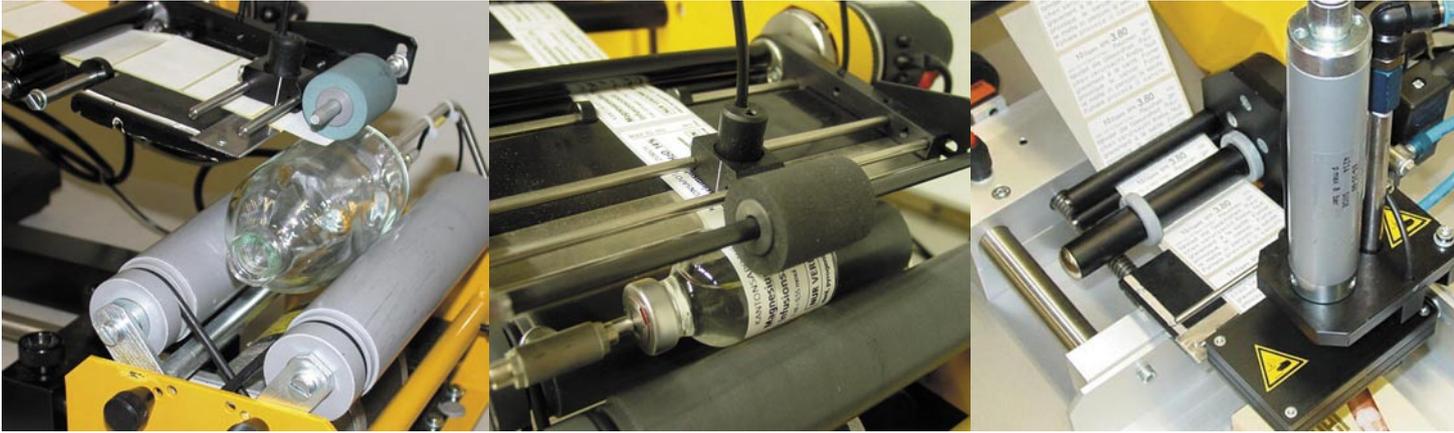

FEATURES

- Flexibility – Wide application range due to the availability of various applicators for specific products
- Collamat® design – Controller, drive unit, rewinder, and control panel integrated in one space-saving unit
- Expandable – Prepared for communication and installation of printers, hot stamps or ink jets
- Modularity – Easy adaptation to new applications
- Easy operation – Settings can easily be changed by 3 potentiometers
- Modular rail mounting – Easy plug-in expansion for options
- Fast set up – Set parameters for label scanner, predispensing, and application speed – and you are ready to work

TECHNICAL DATA

Operational width:	95 mm (3 3/4 in.) or 160 mm (6 1/3 in.)
Max feeding speed:	20 m/min (65 ft/min)
Labelling accuracy:	± 1 mm (1/25 in.)
Min. label length:	10 mm (10/25 in.)
Max label reel diameter:	350 mm (14 in.)
Settings by potentiometer:	Variable speed adjustment, label scanner sensitivity, pre-dispensing
Drive:	2 phase stepping motor
Control:	16 bit microprocessor
Voltage:	115–230 V / 50–60 Hz / 110 VA
Approbation:	CE/Gost

All data are indicative and may be subject to alteration

HM Collamat AG
 Pfeffingerring 201
 CH-4147 Aesch

Phone: +41 (0)61 756 28 28
 Fax: +41 (0)61 756 29 29
 Web: www.collamat.ch
 E-mail: contact@collamat.ch

Member of HM Group

