

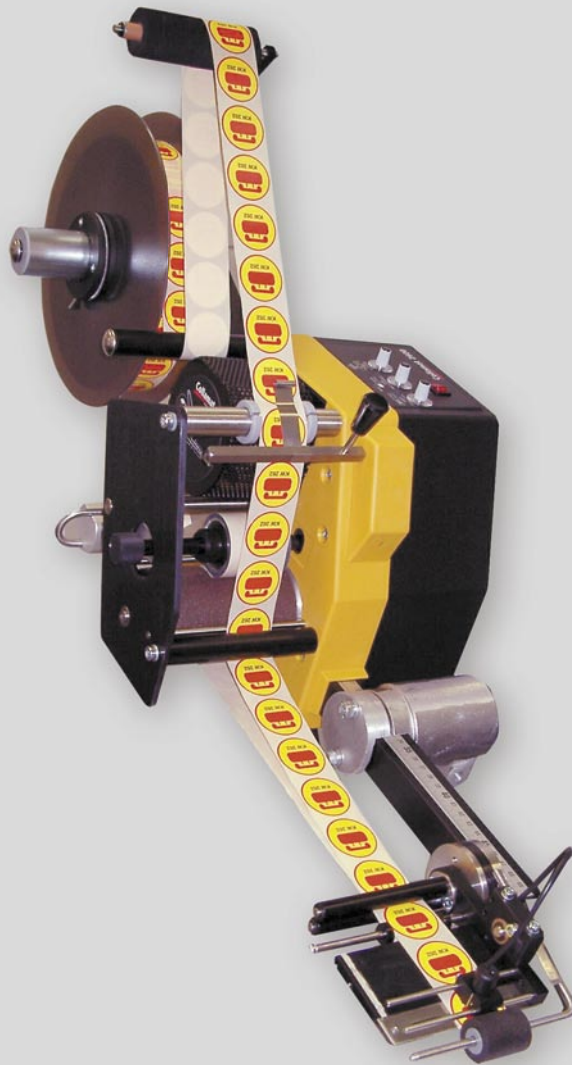


# Collamat® 2610

Your first step. This labeller is intended as the first step to an automated labelling process. Maximising the production output and quality is evident. High reliability is achieved through a simple and robust concept. Set up of the labeller on various lines and to various products is easiest possible. Collamat® 2610 fits ideal into either smaller productions for test series or for promotional labelling in existing lines. All to a very competitive price.

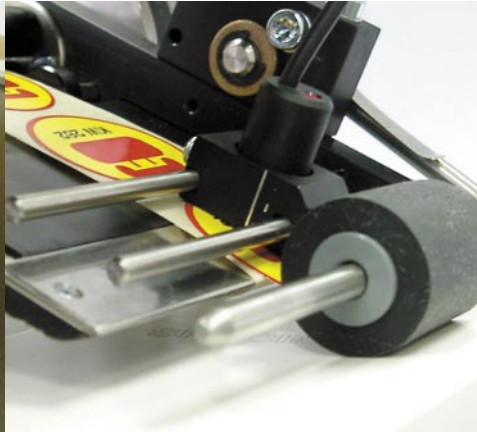

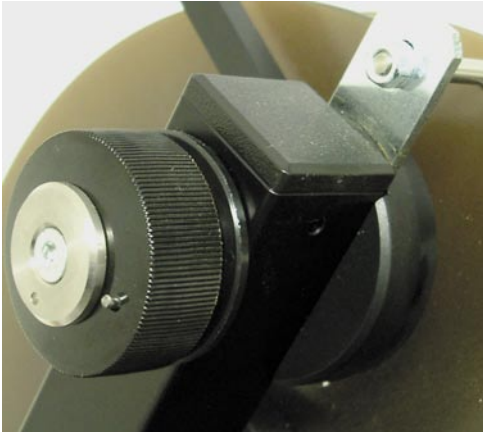

## FEATURES

- Compact design – Minimal space required, ideal to fit into existing production lines
- Flexibility – For top, bottom, and side applications
- Easy handling – Fast set up and short change-over times
- Profitable – Low cost makes small series and promotional labelling attractive
- Efficiency – Process automation increases production output
- Simple operation – Self explanatory control panel minises operating error
- Swiss made – No compromise on reliability or quality

## TECHNICAL DATA

Dispensing speed:	3 - 15 m/m (10 - 50 ft/min)
Operational width:	10 - 95 mm (10/25 - 3 3/4 in.)
Stop accuracy:	± 0.5 mm (1/16 in)
Label length:	10 - 2000 mm (10/25 - 78 3/4 in.)
Control panel:	Integrated in traction unit
Settings by potentiometer:	Variable speed adjustment, label scanner sensitivity, pre-dispensing
Module rail:	500 mm (19 3/4 in.)
Unwinder:	250 mm (9 7/8 in.)
Rewinder:	Integrated in traction unit
Fix applicator:	Spring mounted roller
Mounting:	Left or right
Options:	Kit for side labelling applications
Approbation:	CE/Gost

All data are indicative and may be subject to alteration

©2006 - All IPR's belong to HM Group

HM Collamat AG  
 Pfeffingerring 201  
 CH-4147 Aesch

Phone: +41 (0)61 756 28 28  
 Fax: +41 (0)61 756 29 29  
 Web: [www.collamat.ch](http://www.collamat.ch)  
 E-mail: [contact@collamat.ch](mailto:contact@collamat.ch)

Member of HM Group

