

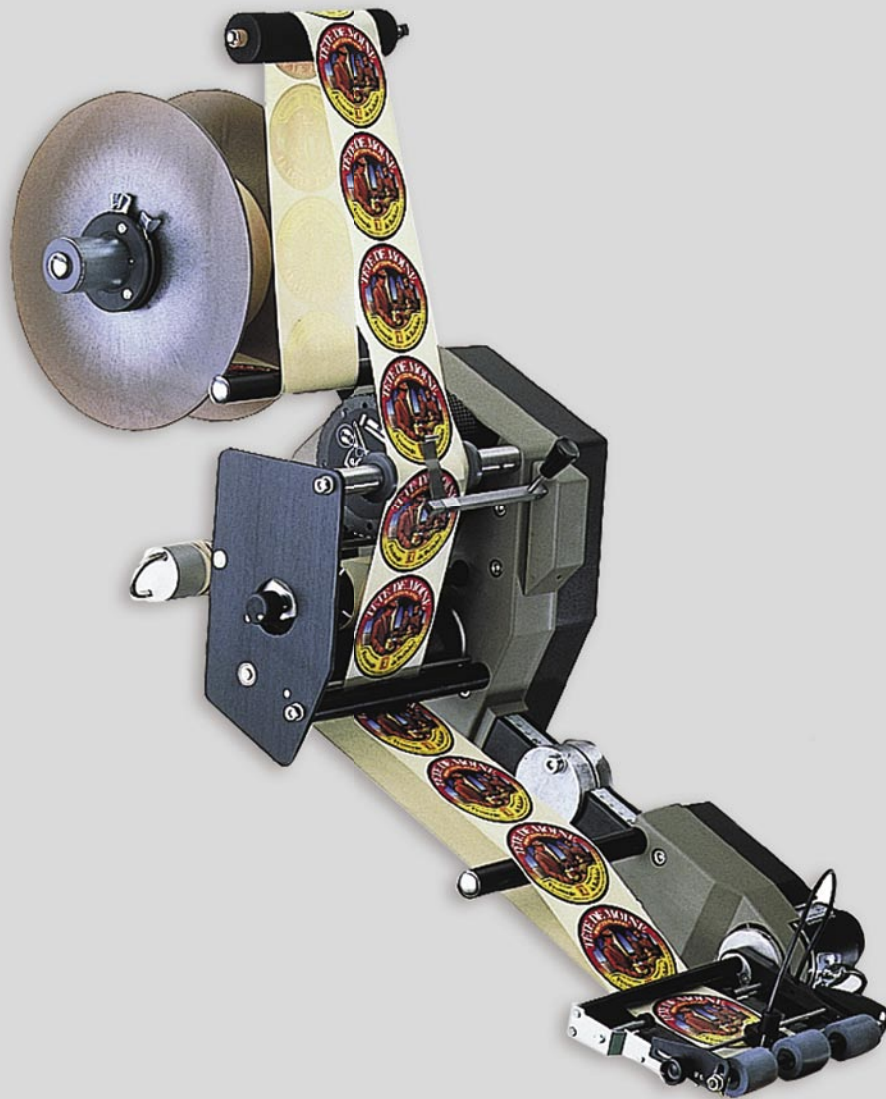


Collamat® 8600

The professional system. The external operator panel, includes a state of the art menu structure and enables operation of normal and advanced settings with minimal operator training. The program storage allows you to save and recall settings for products and reproduce labelling results with minimal effort. Built-in monitoring of statistical functions make the control and optimisation of the labelling process very comfortable. The Collamat® 8600 is your choice if you are looking for a labeller giving you flexibility, high performance, and best accuracy in Swiss quality.

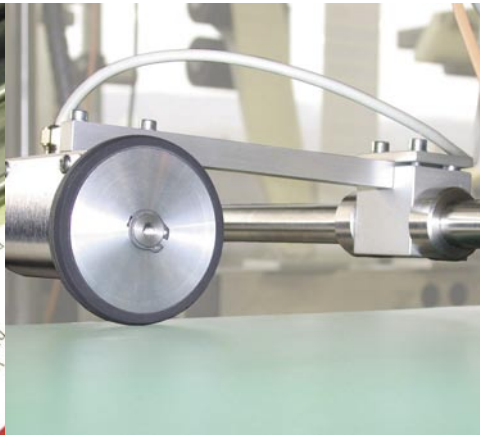

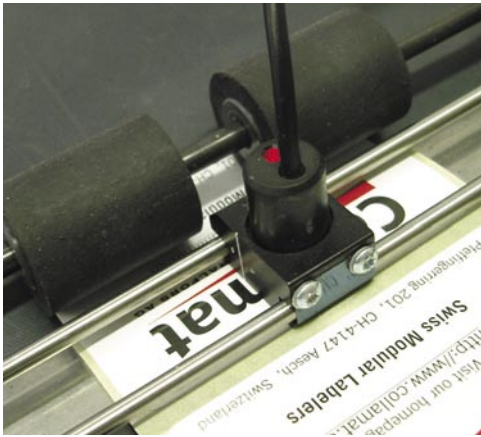

FEATURES

- Speed synchronisation – Automatic continuous adjustment to the actual line speed by encoder
- Zero down time – Two units operating in the non-stop mode guarantee you continuous production flow with minimal manpower
- User-friendly – With the intuitive menu structure the handling is safe and simple
- Memory – The capability to store 32 programs enables quick and reliable product change-over
- Precise labelling – Constant stop resolution over the whole speed range
- Monitoring – Current application data and error messages can be observed by the operator on the monitor's display or read out on a PC

TECHNICAL DATA

	C8610:	C8620:
Passing width of label web:	95 mm (3 3/4 in)	160 mm (6 5/16 in)
Dispensing speed:	50 m/min (164 ft/min)	40 m/min (131 ft/min)
Labelling accuracy:	± 0.5 mm (1/64 in)	± 0.5 mm (1/64 in)
Label reel:	Max outer diameter 350 mm (13 3/4 in)	
Drive:	3 phase-stepping motor	
Control unit:	Micro-processor control unit, SMD-technology, non stop labelling, 32 label programs, service functions	
Power supply:	110-240 V / 50-60 Hz / 310 VA	
Approbation:	CE/Gost	

All data are indicative and may be subject to alteration

HM Collamat AG
Pfeffingerring 201
CH-4147 Aesch

Phone: +41 (0)61 756 28 28
Fax: +41 (0)61 756 29 29
Web: www.collamat.ch
E-mail: contact@collamat.ch

Member of HM Group

