

ST-71 Transporting

Multipurpose for printing in- and off-line



Powerful, reliable and precise

The Conveyor Vacuum Transport reliable transport of envelopes, magazines, paper, cardboard and other stock.

Vacuum system

The mail table is equipped with five vacuum sections each individually controlled. The divided vacuum system makes it possible to feed stock of all shapes and sizes, including very long pieces that remain unfixed until the alignment is correct.

Further it is possible to lower the vacuum directly under a printhead to avoid air turbulence, which also increases the decap time for the ink cartridge. All mail tables are delivered with a built-in 5000 pulses encoder providing a good resolution for equipment such as inkjet printers.

Technical Details

ST-71 Transporting

Power

230 VAC 50 Hz
Optional 115 VAC 60 Hz

Motor

1450 r/min 0,25 KW

Gear

1:5 / M1:40(Drive) / M2:30

Inverter

230 VAC / 0,25 kW or 115 VAC / 0,25 kW

Safety

Emergency stop (optional external stop)

Coatings

Frame: Aluminum Profile Anodised

Environmental conditions

Operating temperature: 10-40° C

Belts

5 (20 x 2380 mm) punched

Vacuum

1 Phase 2 Poles IP54 50 Hz
0.75 Kw 2830 RPM. 110/220V 13.0/6.5A

Encoder

5000 Pu Posital

Running direction

Both directions

Dimensions ST-71




Dim (WxLxH): 702x1140x840 mm
Table feed: 450mm
Height adjustable: 840-900 mm
Weight: approx. 135 kg

Line speed

1 variable speed: up to 150 m/min
2 Distance Left - Right

Work Top

ST-71 Transport: 430x1100 mm

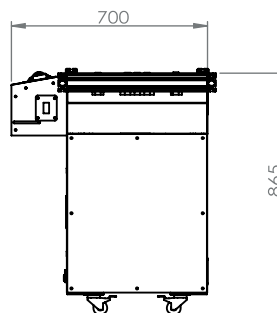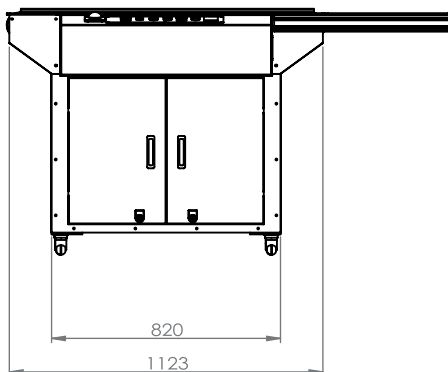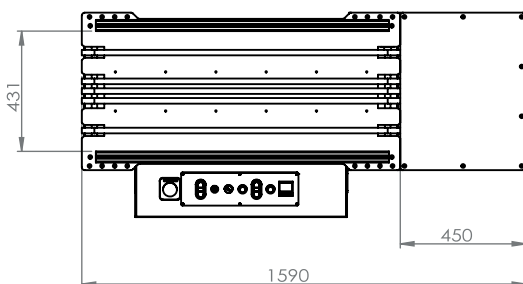

PT Asia Ltd.

998 Moo 3, Samrong Nua,
Muang, Samutprakarn 10270
Thailand

Phone: +66 (0)2 759-3605-12

Fax: +66 (0)2 759-3569

email: info@ptasia.biz

www.ptasia.biz | www.ptasia.asia | www.ptasia.co.th | www.ptasia.info