



Pack Way
SINCE 1979 PACKAGING SYSTEMS®

APEXPACK®



ISO 9001 FM57756

PW-320HS

NEW DIGITAL DISPLAY - "NON-ROUND BELT"

SEMI-AUTO STRAPPING MACHINE

FEATURES:

- The advanced digital display. The strapping tension can be adjusted at a touch and can show the figures from 5 to 50kgs.
- "Super-light strapping tension" Super-perfect performance. It can provide your products to show well.
- "Super-tight strapping tension", Special design-Control PP strap cooling time. It can make the PP strap to fasten well in any time.
- "Electricity-saving" device, the motor automatically stops running after 60 seconds pause to reduce the normal wear and to prolong the machine life.
- The advanced P.C.B microchip circuit board control system, less malfunction and easy maintenance.
- Durable electro-magnetic clutch transmission, lesser wear and lower noise.
- Non-fast heater plate, it will increase the work efficiency.



PW-620HS



Legs and dispensers are disassembled to save transportation costs.
3 units packed in one pallet.
126 units loaded in a 20' feet container.

FEATURE OF PW-620HS, LS, SLS



- New design for adjusting the legs' height. The distance between each hole is 14mm, the height of one section.
- A total of 5 sections can be adjusted if locking 2 screws. The max. height you can increase is 70mm
- A total of 10 sections can be adjusted if locking 1 screw. The max. height you can increase is 140mm


Please see the left figure for reference.

OPTION




The inside diameter of the standard dispenser is 200 mm. Installing extra inner plates can change the inside diameter into 230mm or 280mm. Please see the left figure for reference.


PW-320HS

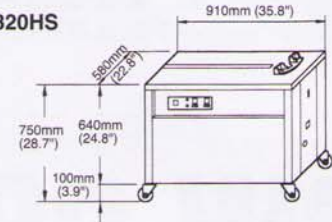


PW-320LS

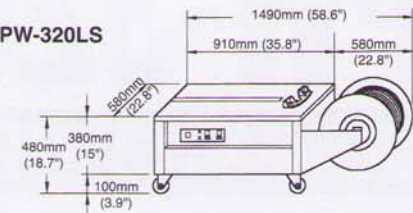


PW-320SLS

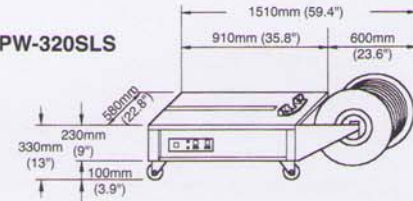


PW-620HS

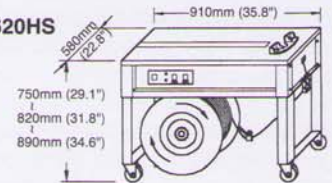

PW-620LS

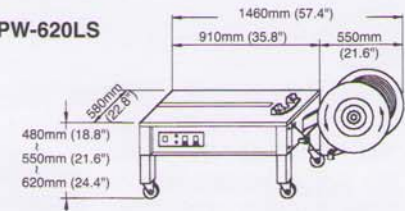

PW-620SLS

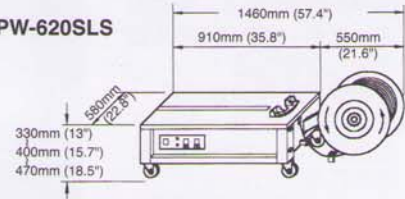

SPECIFICATIONS

Model	PW-320HS PW-620HS	PW-320LS PW-620LS	PW-320SLS PW-620SLS
電 源	Power supply	1ø AC110/220V (50/60Hz)	
	Strap width	9, 12, 15.5 (mm), (adjustable)	
	Tension strength	5~50kgs	
	Strapping speed	2.0 sec./strap	
	Min. package size	60mm	
	Max. package size	Any size	
	Dimension(LxWxH) (mm)	910x580x750(320) 910x580x750(620)	1490x580x480(320) 1460x580x480(620)
淨 重	N.W.	100kgs	90kgs
毛 重	G.W.	120kgs	110kgs
包裝尺寸	Packing size (LxWxH) (mm)	960x610x860	960x610x660
			Machine:960x610x445 Dispenser:580x480x400

Distributor: