



เครื่องซีลกึ่งอัตโนมัติ หัวปรับได้
**HEAD ADJUSTABLE
SEMI-AUTO SEALING MACHINE**

HEAD ADJUSTABLE SEMI-AUTO IMPULSE SEALING MACHINE

KOREA
product

PHS (semi - auto sealer)

The PHS series utilizes a high pressure solenoid and microcomputer operated controller to seal almost any bag easily and securely. The PHS series is an excellent sealer for the semi-automatic packaging of thermal form flexible films. The sealer is also light, compact, easy to carry and can even be placed on a small area.

The PHS is simple to use, and no special skills are required to make a beautiful and strong seal. Turn the knob on the control unit to set conditions such as the heating temperature and cooling time. After setting the appropriate sealing condition for the packaging material and then push the foot switch for start the operate.

Appropriate Applications

Higher volume packaging that require constant use over an extended period of time.

Applications that require uniformly consistent seal precision and strength.

Packaging that requires sealing single-layer PE, CPP or OPP films at the proper temperature every time.

Main Features

Ready for use as soon as the power is turned on.

Quality consistent sealing unaffected by temperature changes in the surrounding environment or the extended use.

Seal pressure may be adjusted to accommodate various films and thicknesses.


The impulse sealers are microprocessor controlled and incorporate following advantages :

No waiting - just turn on the switch for immediate use

No constant high-temperature sealing bars mean very low risk of heat injuries

Save energy costs by using power only during the sealing process

Sealing and cooling performed under continued pressure result in very clean seal.

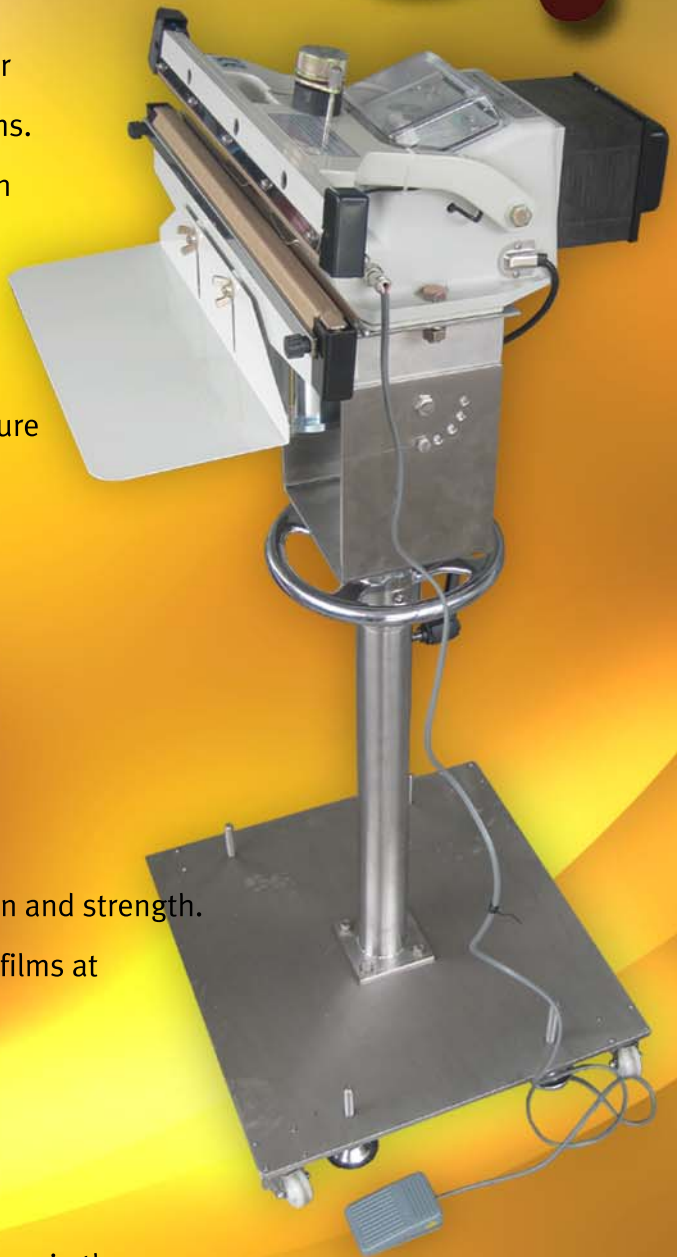

HEAD ADJUSTABLE SEMI-AUTO IMPULSE SEALING MACHINE



KEY PARTS



Solenoid



Stand level wheel



Support Stand



Adjustable Support



Thickness Knop



Heating Wire Holder



Teflon Cloth Holding



Transformer



HEAD ADJUSTABLE SEMI-AUTO IMPULSE SEALING MACHINE



Sealing Model	Sealing Length	Sealing Width
PHS-300/2/5/10	300mm (12")	2, 5, 10mm
PHS-450/2/5/10	450mm (18")	2, 5, 10mm
PHS-600/2/5/10	600mm (24")	2, 5, 10mm
PSH-800/2/5	800mm (32")	2, 5mm

D Type : Up and Down Heating Element equipped